

dos feed C

material feeding from
cartridges with low
volumes of material.

For pasty media with a viscosity from 70,000 mPa·s.



dosmatix.com/en/dos-feed-c

weight-optimized for precise potting results

- Lightweight design for maximum dispensing speed
- Space-saving, slim design

user friendly handling


- Innovative bayonet closure for quickest possible cartridge replacement
- Level indication by means of LED scale

variable sizes for common cartridge types

- Available in two versions: 6 and 20 oz.
- Compatible with manufacturers such as Semco cartridges



the innovations of dos feed C

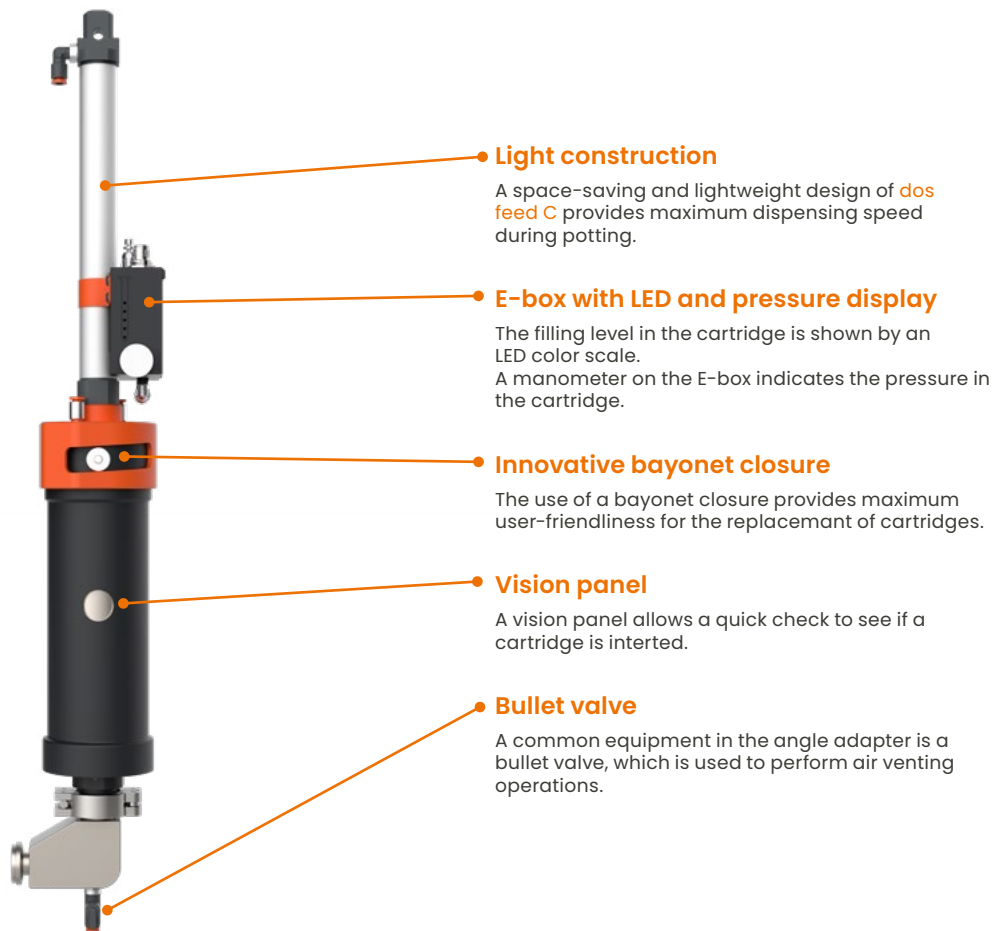

Light construction

A space-saving and lightweight design of dos feed C provides maximum dispensing speed during potting.

E-box with LED and pressure display

The filling level in the cartridge is shown by an LED color scale. A manometer on the E-box indicates the pressure in the cartridge.

Innovative bayonet closure

The use of a bayonet closure provides maximum user-friendliness for the replacement of cartridges.

Vision panel

A vision panel allows a quick check to see if a cartridge is inserted.

Bullet valve

A common equipment in the angle adapter is a bullet valve, which is used to perform air venting operations.

technical data

dos feed C Variants	dos feed C S	dos feed C M
Cartridge size	6 oz. / 180 cc	20 oz. / 600 cc
Weight	ca. 1.20 kg	ca. 2.10 kg
Max. height cartridge holder	432 mm	568 mm
Max. height with angle adapter	540 mm	678 mm
Cartridge diameter	46.50 mm	73 mm


dosmatix gmbh

Abensberger Straße 9
93352 Rohr i. NB

info@dosmatix.com
www.dosmatix.com
+49 8783 9667 50

sales

sales@dosmatix.com
+49 8783 9667 530



dosmatix navigator

